


OCEANFIBRE® HIGH PERFORMANCE ROUND SLINGS


- Slings from MBL 10t up to 2,500t (WLL from 2t to 500t).
 - Available in endless (grommet) or eye-and-eye form
 - Each individual sling is made to a Quality Plan to ensure conformance and consistency in quality and workmanship
 - Optional Ocean Barrier sand filter to prevent internal abrasion of the yarn
 - Optional ROV grab handles to prevent damage to the sling while in use
 - Covers are heavy duty woven HMPE/Cordura available as Ocean A, Ocean B or Ocean C type depending upon application and protection factor required
- From 1m up to 100m in working length
 - Length tolerance +/- 40mm (zero tension)
 - Slings made to major international standards including ASME, AS, MD2006/42/EC and DNV
 - Made with Premium High Modulus Polyethylene Fibres
 - Supplied with detachable or fixed wear pads for additional protection

AVAILABLE OUTER JACKET TYPES:

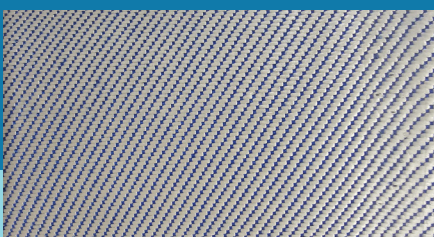


OCEAN A

Heavy duty woven blend of HMPE and Cordura

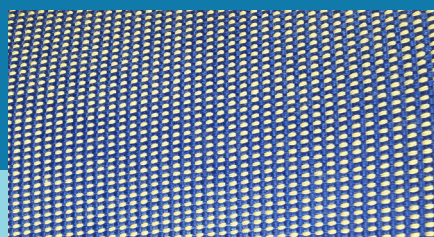

OCEAN B

Heavy duty woven blend of Kevlar and Cordura

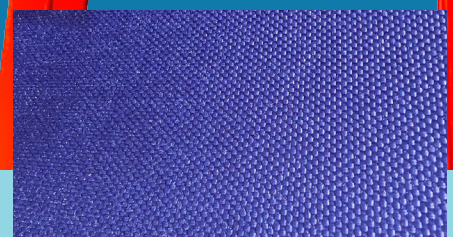

OCEAN C

Cordura in high visibility colours



GROMMET/ SLING NO.	MBL	SLING DIA	WIDTH WITH JACKET	MINIMUM BEND DIAMETER	APPROX. LINEAR WEIGHT IN AIR	WORKING LOAD LIMIT (WLL) - VERTICAL (METRIC TONS)		
						Metric Tons	mm	mm
OF-10	10	11	22	22	0.3	2.0	1.7	1.4
OF-15	15	13	25	27	0.4	3.0	2.5	2.1
OF-20	20	16	27	31	0.4	4.0	3.3	2.9
OF-25	25	17	29	35	0.5	5.0	4.2	3.6
OF-30	30	19	31	38	0.6	6.0	5.0	4.3
OF-35	35	21	33	41	0.6	7.0	5.8	5.0
OF-40	40	22	34	44	0.7	8.0	6.7	5.7
OF-45	45	23	36	47	0.7	9.0	7.5	6.4
OF-50	50	25	37	49	0.8	10.0	8.3	7.1
OF-60	60	27	40	54	0.9	12	10	9
OF-70	70	29	42	58	1.1	14	12	10
OF-80	80	31	44	62	1.2	16	13	11
OF-90	90	33	46	66	1.3	18	15	13
OF-100	100	35	48	70	1.4	20	17	14
OF-110	110	36	49	71	1.5	22	18	16
OF-120	120	37	51	75	1.6	24	20	17
OF-130	130	39	53	78	1.7	26	22	19
OF-140	140	40	54	81	1.8	28	23	20
OF-150	150	43	58	87	2.0	30	25	21
OF-160	160	45	60	91	2.2	32	27	23
OF-170	170	46	61	92	2.3	34	28	24
OF-180	180	48	63	96	2.4	36	30	26
OF-190	190	49	64	98	2.5	38	32	27
OF-200	200	50	65	101	2.6	40	33	29
OF-225	225	53	69	107	2.9	45	38	32
OF-250	250	59	75	118	3.5	50	42	36
OF-275	275	62	78	124	3.9	55	46	39
OF-300	300	65	82	130	4.2	60	50	43
OF-325	325	67	84	134	4.4	65	54	46
OF-350	350	71	88	143	4.9	70	58	50
OF-375	375	74	91	148	5.2	75	63	54
OF-400	400	76	94	152	5.6	80	67	57
OF-425	425	78	96	156	5.8	85	71	61
OF-450	450	81	99	162	6.2	90	75	64
OF-475	475	82	101	165	6.4	95	79	68
OF-500	500	85	104	170	6.8	100	83	71
OF-550	550	89	108	179	7.4	110	92	79
OF-600	600	93	113	187	8.1	120	100	86
OF-650	650	97	117	194	8.7	130	108	93
OF-700	700	101	121	202	9.3	140	117	100
OF-750	750	104	125	209	9.9	150	125	107
OF-800	800	108	129	216	10.6	160	133	114
OF-850	850	110	131	220	11.0	170	142	121
OF-900	900	119	141	238	12.7	180	150	129
OF-950	950	121	143	242	13.2	190	158	136
OF-1000	1000	123	146	247	13.6	200	167	143
OF-1100	1100	142	166	284	18.4	220	183	157
OF-1250	1250	151	176	302	20.8	250	208	179
OF-1500	1500	165	192	330	24.5	300	250	214
OF-1750	1750	179	207	357	28.5	350	292	250
OF-2000	2000	191	220	381	32.2	400	333	286
OF-2500	2500	213	245	427	39.9	500	417	357

NOTE: Sling linear weight will vary with length and customisation – please confirm weight at time of enquiry.